



UL Listed to Canadian safety standards
Classified by UL to NSF Std. #4

Specifications

Wittco 1826 Series heated holding and transport cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid), simple knob actuated electronic control for holding at temperatures up to 190°F (88°C). Adjustable tray slides hold 18"x26"x1" sheet pans, 12"x20"x2 1/2" steam table pans, or a combination of both on 1 1/2" centers. Lip-load racking holds 18"x26"x1" on 1 1/2" centers. Shelving will handle a variety of pan sizes. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 2" in side walls and 2" in top. Integrated steel frame for maximum strength. Lifetime warranty on heating elements. Complete with rear mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1,500 watts, 12.5 amps.

1826 Series Holding & Transport Cabinets

1826-5-1M1ZN

1826-7-1M1ZN

1826-131M1ZN

1826-15-1M1ZN

1826-18-1M1ZN

See table on reverse for capacities

Standard Features

- Capacity with adjustable tray slides
18"x26"x1 1/2" sheet pans
12"x20"x2 1/2" steam table pans
Or a combination of both on 3" centers
See table on reverse for capacities
- Capacity with lip-load racking
1826-7 Fifteen 18"x26"x1" sheet pans
1826-15 Thirty 18"x26"x1" sheet pans
- Capacity with shelves
1826-7 Comes with 3 adjustable shelves
1826-15 Comes with 6 adjustable shelves
- Blower motor for gentle and even temperature distribution
- 5" Heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted handles
- Simple knob actuated electronic control for holding at temperatures up to 190°F (88°C)
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 2" in side walls and 2" in top
- Integrated steel frame for maximum strength
- Magnetic action door latch
- Lifetime warranty on heating elements
- Complete with rear-mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volts, 1,500 watts, 12.5 amps

Options





- Full perimeter bumper
- 208/240 volts
- Left hand hinged door
- Glass Doors (1826-7 and 1826-15 only)

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

1826 Series Holding & Transport Cabinets

- 1826-5-1M1ZN
- 1826-7-1M1ZN
- 1826-13-1M1ZN
- 1826-15-1M1ZN
- 1826-18-1M1ZN

Drawings shown with optional bumper
Which adds 3½" to the width of a cabinet.

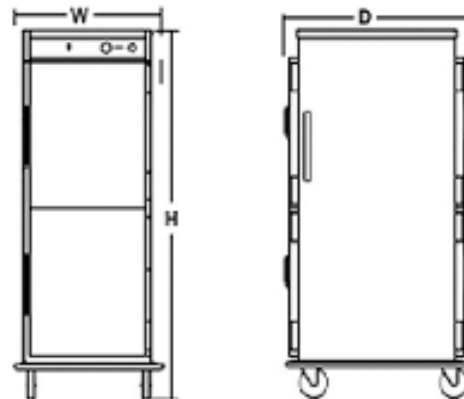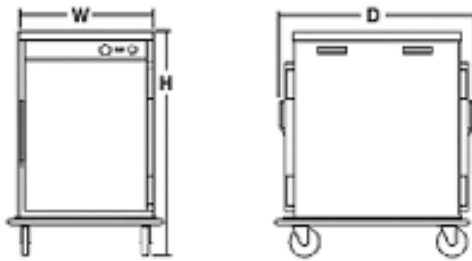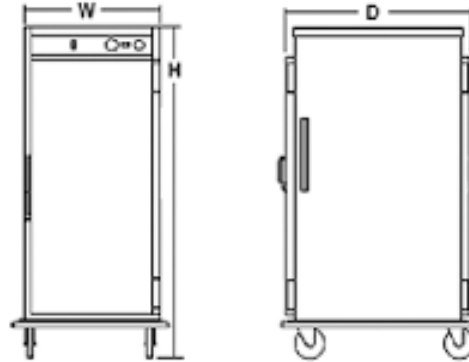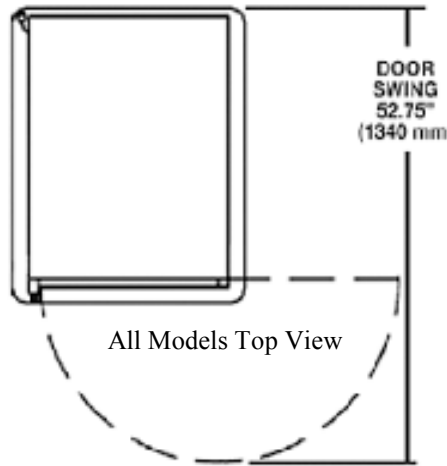

Model	Capacity			Exterior Dimensions	Electrical			Shipping Weight						
		12"x20"x2½ Pans	18"x26" Sheet Pans		Volts	Watts	Amps							
1826-5	Adjustable Tray Slides	10	5	27¼"W x 33"D x 30½"H	120	1,500	12.5	179 lbs						
1826-7	Adjustable Tray Slides	14	7	27¼"W x 33"D x 39"H				120	1,500	12.5	198 lbs			
	Lip-Load Racking	NA	15											
Adjustable Shelves	Unit comes with 3 shelves													
1826-13	Adjustable Tray Slides	26	13	27¼"W x 33"D x 59¼"H							120	1,500	12.5	270 lbs
1826-15	Adjustable Tray Slides	30	15	27¼"W x 33"D x 65¼"H										120
	Lip-Load Racking	NA	30											
Adjustable Shelves	Unit comes with 6 shelves													
1826-18	Adjustable Tray Slides	36	18	27¼"W x 33"D x 73½"H	120	1,500	12.5	337 lbs						

Note: In line with its policy to continually improve its products, Wittco Foodservice Equipment reserves the right to change materials and specifications without notice.

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

414-434-4713 FAX 414-354-2821