



UL Listed to Canadian safety standards
Classified by UL to NSF Std. #4

Specifications

Wittco 1826 Pass Through Series heated holding and transport cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid), heating indicator light, thermometer, and full range thermostat for temperatures up to 190°F (88°C). Adjustable trays slides hold 18"x26"x1" sheet pans, 12"x20"x2½" steam table pans, or a combination of both on 1½ centers. Lip-load racking holds 18"x26"x1" on 1½" centers. Shelving will handle a variety of pan sizes. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 2" in side walls and 2" in top. Integrated steel frame for maximum strength. Lifetime warranty on heating elements. Complete with top mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1,000 watts, 8.3 amps. For 7 pan unit, 120 volts, 1,200 watts, 10 amps for 13 and 15 pan units.

1826 Pass Through Series Holding & Transport Cabinets

1826-7-PT-1M1AN

1826-13-PT-1M1AN

1826-15-PT-1M1AN

See table on reverse for capacities

Standard Features

- Capacity with adjustable tray slides
18"x26"x1½" sheet pans
12"x20"x2½" steam table pans
Or a combination of both on 3" centers
See table on reverse for capacities
- Capacity with lip-load racking
1826-7-PT Fifteen 18"x26"x1" sheet pans
1826-15-PT Thirty 18"x26"x1" sheet pans
- Capacity with shelves
1826-7-PT Comes with 3 adjustable shelves
1826-15-PT Comes with 6 adjustable shelves
- Blower motor for gentle and even temperature distribution
- 5" Heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted handles
- Heating indicator light
- Thermometer
- Full range thermostat for temperatures up to 190°F (88°C)
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 2" in side walls and 2" in top
- Integrated steel frame for maximum strength
- Magnetic action door latch
- Lifetime warranty on heating elements
- Complete with top-mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volts, 1,000 watts, 8.3 amps (1826-7-PT)
- 120 volts, 1,200 watts, 10 amps (1826-13-PT & 1826-15-PT)

Options

- Full perimeter bumper
- 208/240 volts
- Left hand hinged door
- Additional universal tray slides

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA



414-434-4713

FAX 414-354-2821


1826 Pass Through Series Holding & Transport Cabinets

1826-7-PT-1M1AN
1826-13-PT-1M1AN
1826-15-PT-1M1AN


Drawings shown with optional bumper
Which adds 3½" to width of the unit.

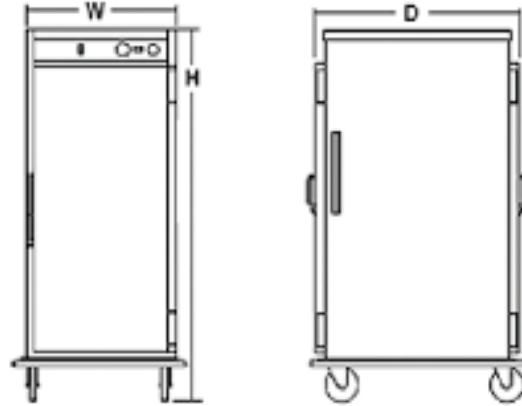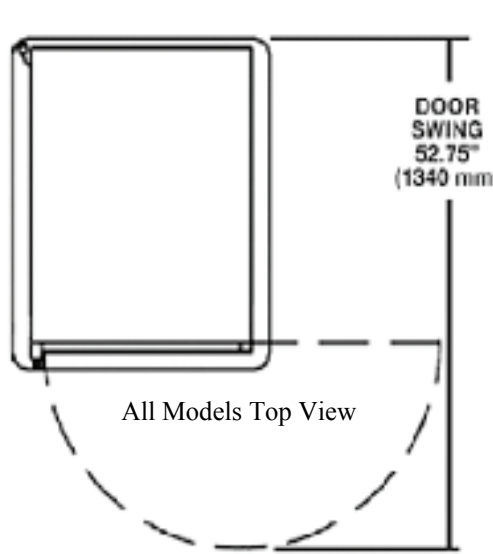

1826-13-PT Front & Side View

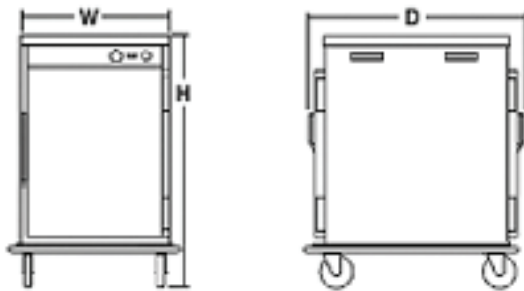

1826-7-PT Front & Side View

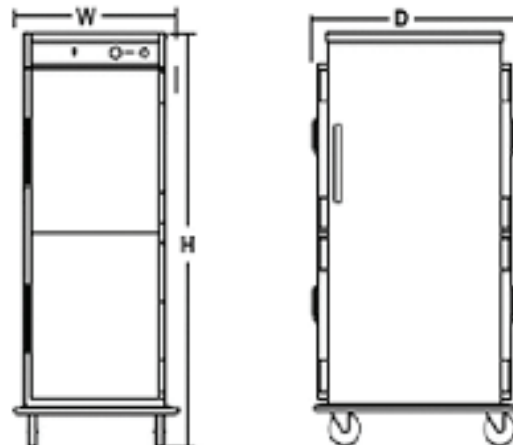

1826-15-PT Front & Side View

1826-7	Adjustable Tray Slides	14	7	25"W x 33"D x 40"H	120	1,000	8.3
	Lip-Load Racking	NA	15				
	Adjustable Shelves	Unit comes with 3					
1826-13	Adjustable Tray Slides	26	13	25"W x 33"D x 61"H	120	1,200	10.0
1826-15	Adjustable Tray Slides	30	15	25"W x 33"D x 66½"H	120	1,200	10.0
	Lip-Load Racking	NA	30				
	Adjustable Shelves	Unit comes with 6					

Note: In line with its policy to continually improve its products, Wittco Foodservice Equipment

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

414-434-4713 FAX 414-354-2821