



UL Listed to Canadian safety standards
Classified by UL to NSF Std. #4

Specifications

Wittco 1826 Pass Through Series heated holding and transport cabinets. Blower motor for gentle and even temperature distribution. Complete with 5" heavy duty casters (2 swivel with brakes and 2 rigid), simple knob actuated electronic control for holding at temperatures up to 190°F (88°C). Adjustable trays slides hold 18"x26"x1" sheet pans, 12"x20"x2 1/2" steam table pans, or a combination of both on 1 1/2" centers. Lip-load racking holds 18"x26"x1" on 1 1/2" centers. Shelving will handle a variety of pan sizes. Cabinet interior and exterior are both constructed out of 20 gauge stainless steel. Recessed side-mounted handles, magnetic action door latch, and full insulation; 2" in side walls and 2" in top. Integrated steel frame for maximum strength. Lifetime warranty on heating elements. Complete with side mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts. 120 volts, 1,500 watts, 12.5 amps.

1826 Pass Through Series Holding & Transport Cabinets

1826-7-PT-1E1AN
1826-13-PT-1E1AN
1826-15-PT-1E1AN
1826-18-PT-1E1AN

See table on reverse for capacities

Standard Features

- Capacity with adjustable tray slides
18"x26"x1 1/2" sheet pans
12"x20"x2 1/2" steam table pans
Or a combination of both on 3" centers
See table on reverse for capacities
- Capacity with lip-load racking
1826-7-PT Fifteen 18"x26"x1" sheet pans
1826-15-PT Thirty 18"x26"x1" sheet pans
- Capacity with shelves
1826-7-PT Comes with 3 adjustable shelves
1826-15-PT Comes with 6 adjustable shelves
- Blower motor for gentle and even temperature distribution
- 5" Heavy duty casters (2 with swivel with brakes and 2 rigid)
- Recessed side mounted handles
- Simple knob actuated electronic control for holding at temperatures up to 190°F (88°C)
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Fully insulated with 2" in side walls and 2" in top
- Integrated steel frame for maximum strength
- Magnetic action door latch
- Lifetime warranty on heating elements
- Complete with side-mounted cord and plug: NEMA 5-15 for 120 volts and NEMA 6-15 for 208-240 volts
- 120 volts, 1,500 watts, 12.5 amps

Options



- Full perimeter bumper
- 208/240 volts
- Left hand hinged door
- Additional universal tray slides

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA


1826 Pass Through Series Holding & Transport Cabinets

1826-7-PT-1E1AN
1826-13-PT-1E1AN
1826-15-PT-1E1AN


Drawings shown with optional bumper
Which adds 3½" to width of the unit.

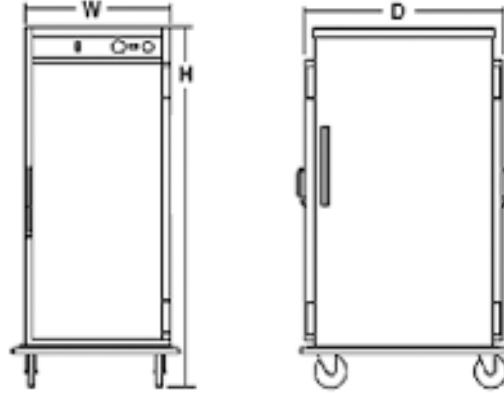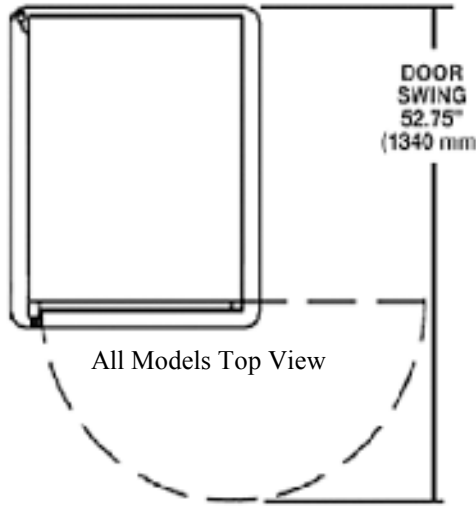

1826-13-PT Front & Side View

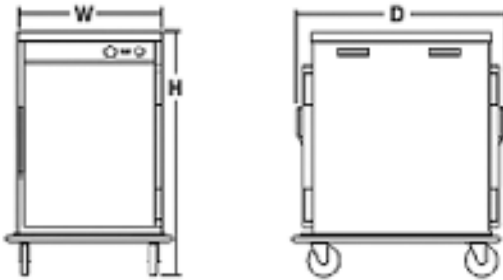

1826-7-PT Front & Side View

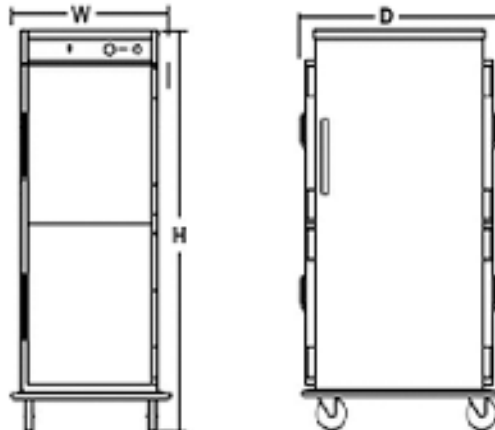

1826-15-PT & 1826-18-PT Front & Side View

Model		12"x20"x2½" Pans	18"x26" Sheet Pans	Exterior Dimensions	Volts	Watts	Amps	Shipping Weight
1826-7-PT	Adjustable Tray Slides	14	7	27¼"W x 35"D x 39"H	120	1,500	12.5	198 lbs
	Lip-Load Racking	NA	15					
	Adjustable Shelves	Unit comes with 3 shelves						
1826-13-PT	Adjustable Tray Slides	26	13	27¼"W x 35"D x 59¼"H	120	1,500	12.5	270 lbs
1826-15-PT	Adjustable Tray Slides	30	15	27¼"W x 35"D x 65¼"H				
	Lip-Load Racking	NA	30					
	Adjustable Shelves	Unit comes with 6 shelves						297 lbs
1826-18-PT	Adjustable Tray Slides	36	18	27¼"W x 35"D x 73½"H				337 lbs

Note: In line with its policy to continually improve its products, Wittco Foodservice Equipment

Wittco Foodservice Equipment 7737 N 81st Street Milwaukee, WI 53223 USA

414-434-4713 FAX 414-354-2821